


I-SFT 120i.06 6.5"VGA

Transportation / Industry / Outdoor

tentative



- 1200 cd/m² Luminance
- Integrated Inverter
- Rugged System
- Extended Temperature Range
- Long Life CCFL
- Daylight Readable

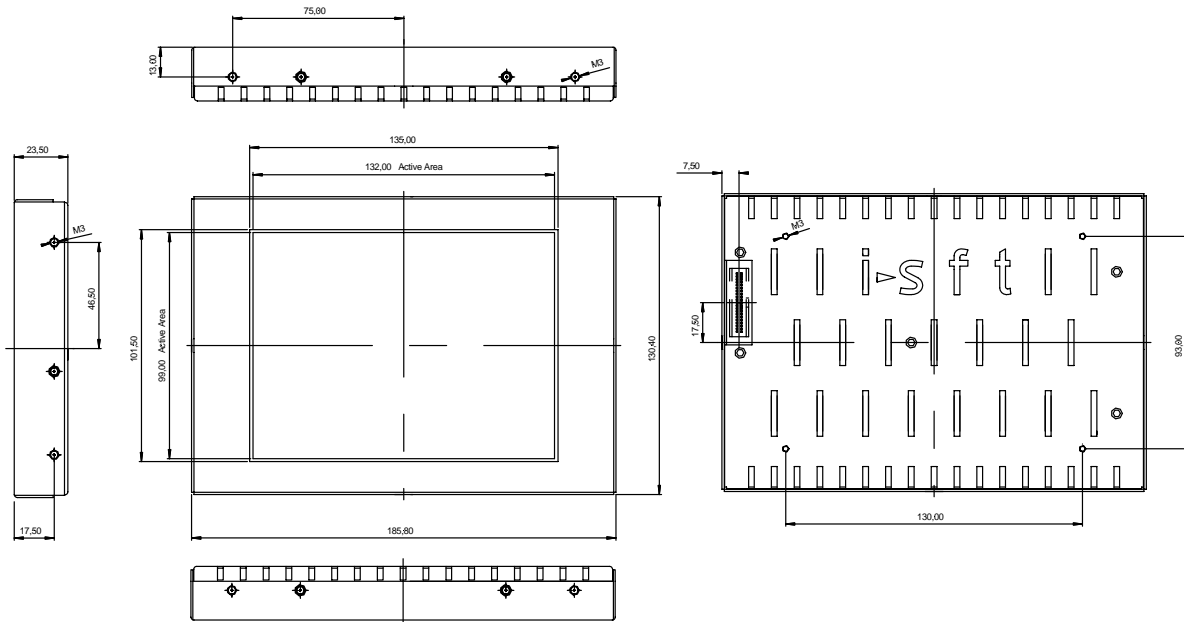

www.i-sft.com

Resolution		VGA
Colors	k (1024)	256
Screen Diagonal		6.5"
Luminance (typ.)	cd/m ²	1200
Dimming		1000 : 1
MTTH	Hours	>50.000
Contrast (typical)		450 : 1
Viewing Angle T/D	CR5 /°	50 / 50
Viewing Angle R/L	CR5 /°	35 / 50
Shock (Operating)	g; ms	tbd
Vibration (Operating)	g; Hz	tbd

Temperature (Operating)	°C	- 20°C to 71°C
Temperature (Storage)	°C	- 25°C to 75°C
Weight	g	660
Input Signal		6-bit RGB
Size (WxHxD)	Typ. mm	285.8x130.4x23.5
Power	Watt	10 (typ.)
Supply Voltage	V DC	12 int. Inverter 3.3 or 5 LCD